HEAT&GLO
No one builds a better fire

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

REVO-V12
Direct Vent Gas Fireplace

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		VIEWING AREA
	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	
REVO-V12	19-1/4	20-1/8	19-1/4	20-1/8	36-1/8	43-1/8	7-7/8	2-5/8	12 x 24

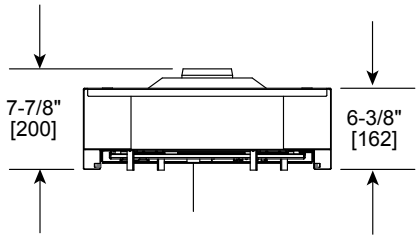

Top View

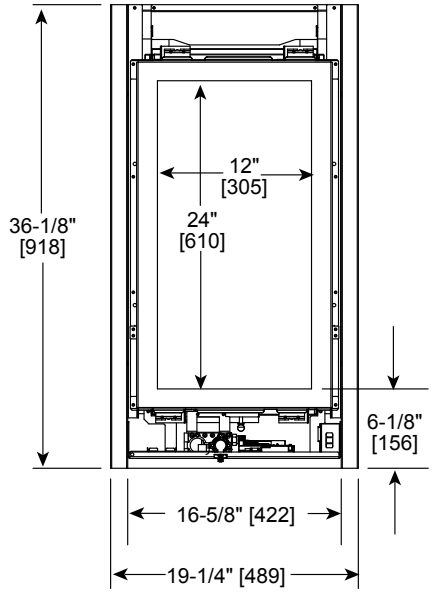

Front View

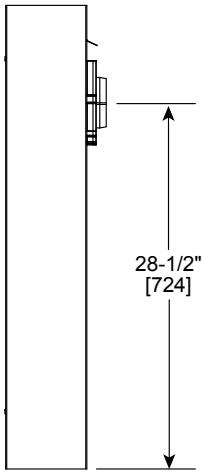

Side View

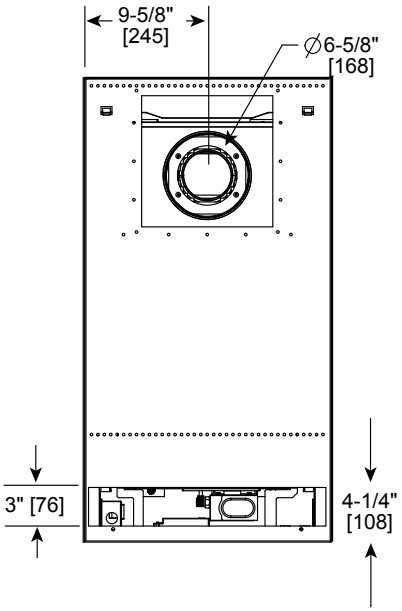

Rear View



Studio/Frame

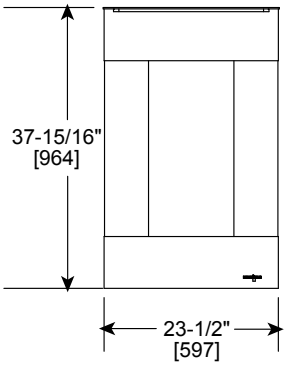

Radius Front

MINIMUM FIREPLACE CLEARANCES

AREA	TO COMBUSTIBLES (in inches)
CLEARANCE TO CEILING	24
FINISHED FLOOR	4
COMBUSTIBLE FLOORING	0
BEHIND APPLIANCE	0
TO ADJACENT WALL	12

ON-WALL MANTEL PROJECTIONS

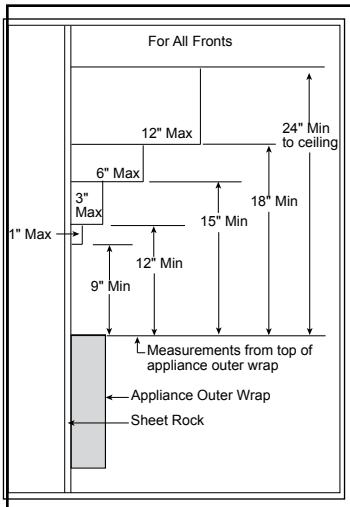

Combustible Mantel

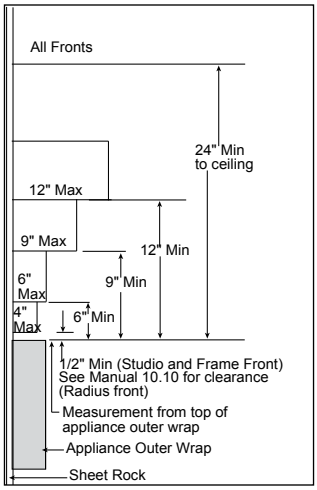

Non-Combustible Mantel

IN-WALL MANTEL PROJECTIONS

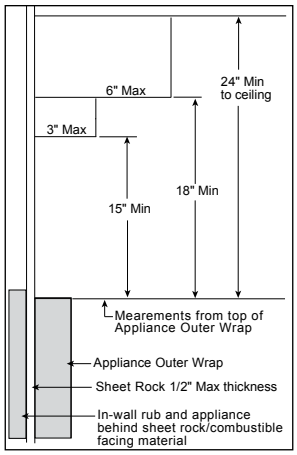

Combustible Mantel

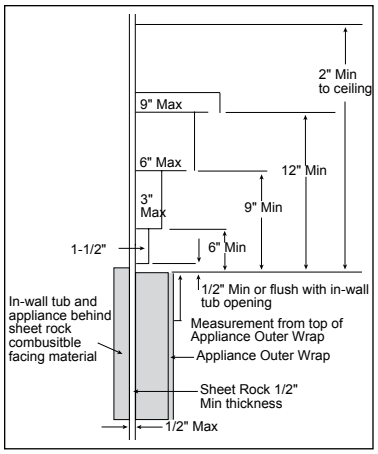

Non-Combustible Mantel

IN-WALL FRAMING DIMENSION

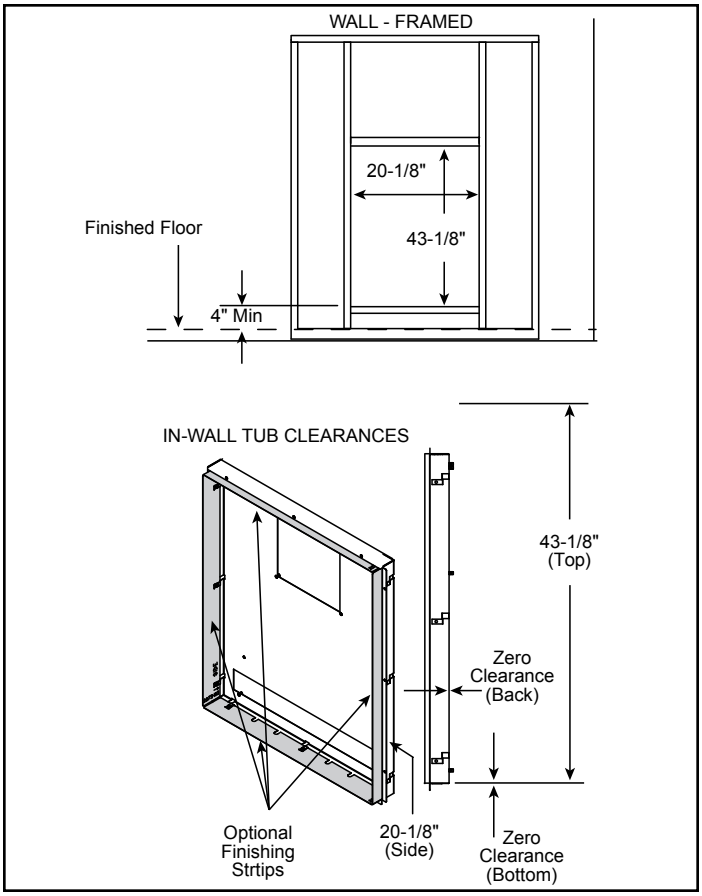

CLEARANCES TO COMBUSTIBLES

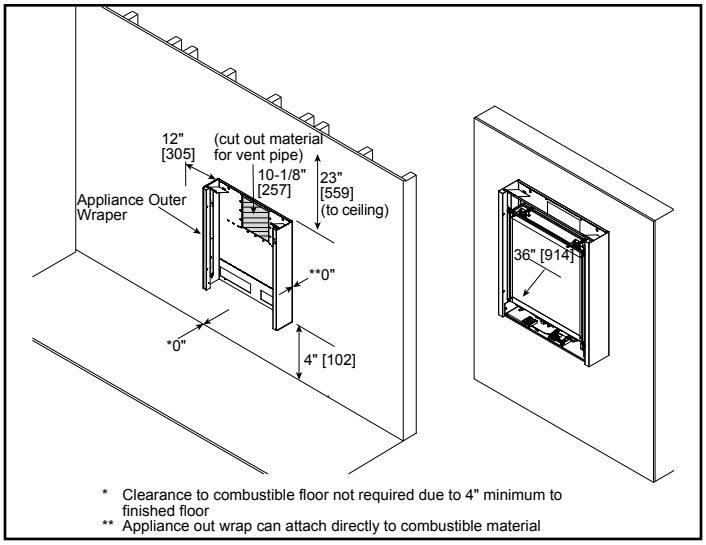

* Clearance to combustible floor not required due to 4" minimum to finished floor
** Appliance out wrap can attach directly to combustible material

PRODUCT LISTING CODES	
US	ANSI Z21.88*2009
CAN	CSA 2.33a-2009
c UL us LISTED	UL307B

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatnglo.com